
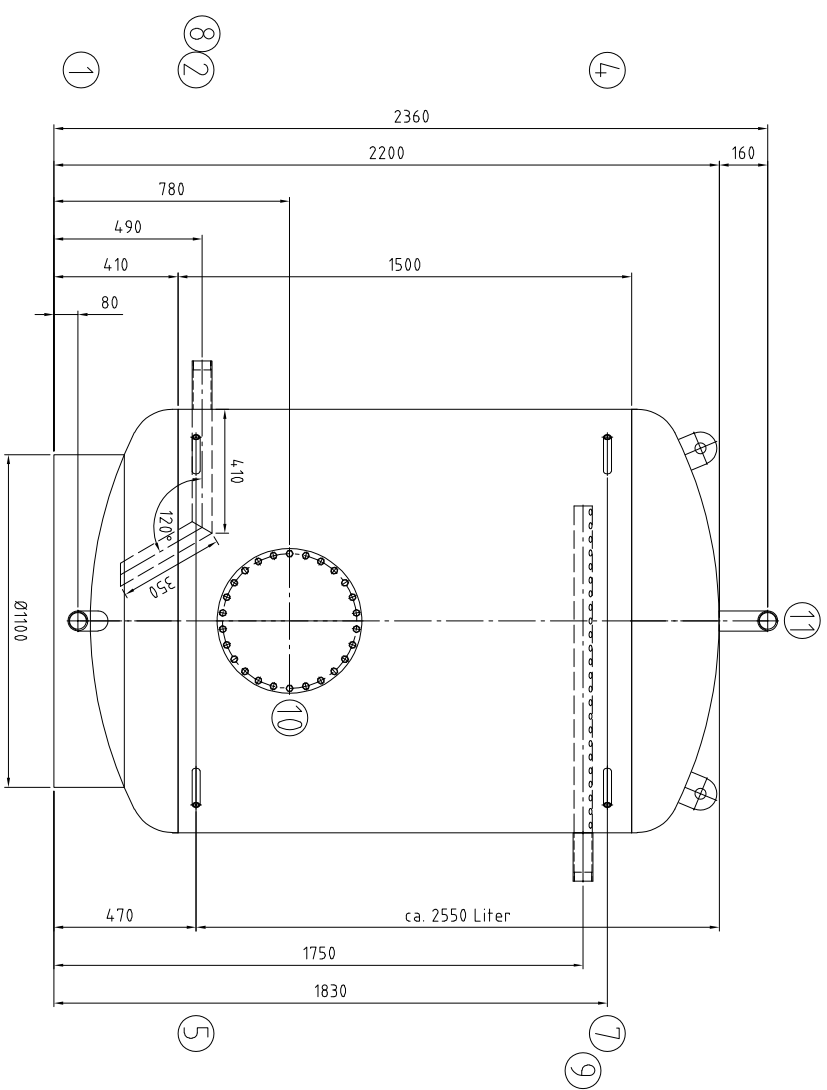


Commerce et bureau - 2

Min./max. zul. Druck	(PS)	0/10	bar
Min./max. zul. pressure	(PS)	0/10	bar
Min./max. zul. Temperatur	(TS)	0/109	°C
Min./max. allow. temperature	(TS)	0/109	°C
Prüfdruck	(PT)	13	bar
Test pressure	(PT)	13	bar
Volumen	(V)	3050	L
Capacity	(V)	3050	L
Oberflächenbearbeitung	gebeizt und passiviert		
Surface treatment	picked and passivated		
Werkstoff	1.4404/1.4571 316Ti/316L		
material	1.4404/1.4571 316Ti/316L		
Gewicht	500		kg
Weight	500		kg
Artikel-Nr.			
Article number			
Kategorie/Modul DGR, 2014/68/EU			
Category/module PED 2014/68/EU			
Artikel 4, Abs. 3			

Für die Lage der Stützen ist ausschließlich die Draufsicht verbindlich!

Seule la vue de dessus fait foi pour la position des raccords !

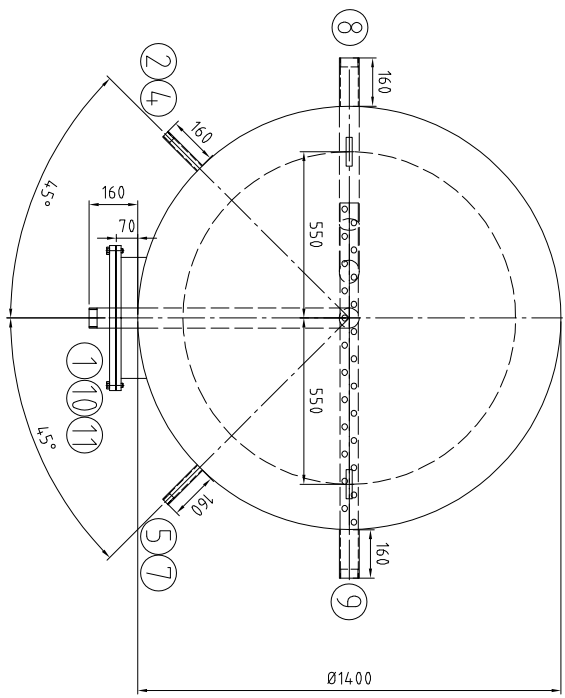

Kippmaß/ Côte de basculement: 2505mm