
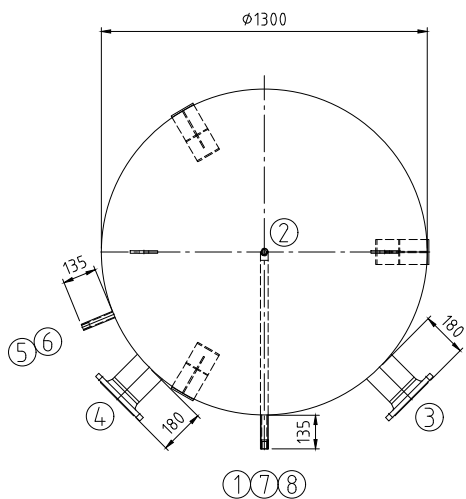


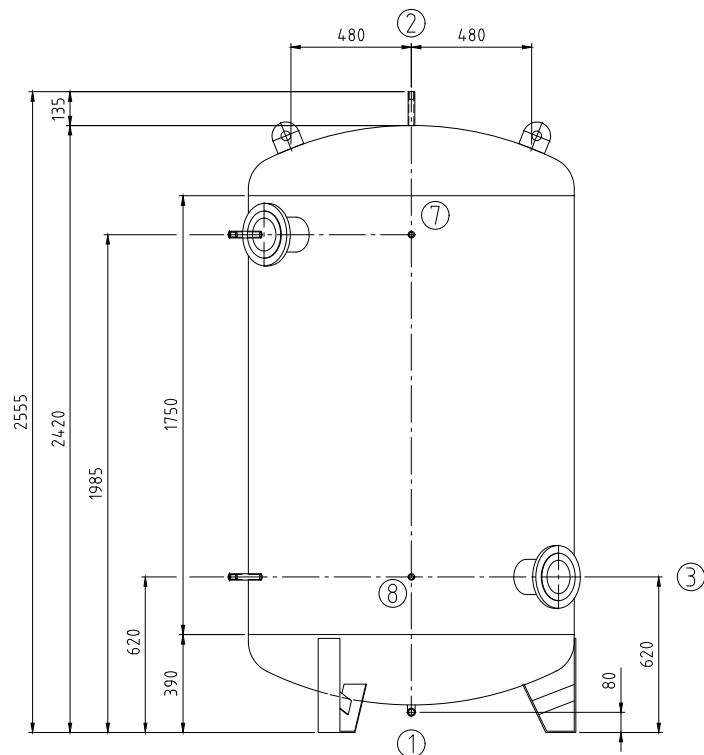

Kippmaß: 2720

		Mantelraum Inside of jacket		Rohrraum Inside of tubes	
Min./max. zul. Druck Min./max. allow. pressure	(PS)	0 / 6			
Min./max. zul. Temperatur Min./max. allow. temperature	(TS)	0 / 45		°C	
Prüfdruck Test pressure	(PT)	9		bar	
Volumen Capacity	(V)	2700		L	
Oberflächenbearbeitung Surface treatment		gebeizt und passiviert pickled and passivated			
Werkstoff material		1.4301			
Gewicht Weight		360 kg			
Artikel-Nr. Article number					
Kategorie/Modul DGRL 2014/68/EU Category/module PED 2014/68/EU		Art. 4 Abs. (3)			

8	Thermometer	Rp 1/2"	DIN 2986			
7	Thermometer	Rp 1/2"	DIN 2986			
6	Sonde	Rp 1/2"	DIN 2986			
5	Sonde	Rp 1/2"	DIN 2986			
4	Flanshanschluss / flange connection	125	16	EN 1092-1/11		
3	Flanshanschluss / flange connection	125	16	EN 1092-1/11		
2	Entlüftung	Rp 1/2"	DIN 2986			
1	Entleerung	Rp 3/4"	DIN 2986			

Stutzen Nozzle	Benennung Denomination	DN	PN	Norm Standard	Dichtfläche Facing	Position Position	Rohrabmessung Dimension

Rev1	16.12.2025	Altmanshofer	Wihan	Änderung laut Kundenwunsch / Change according to customer request	
Index	Datum/date	Gez./drawn	Gepr./appr.	Art der Änderung / Modification	
	Datum/date	Name/name	Kennwort/Subject:		
Gez. / drawn	10.12.2025	Altmanshofer			
Gepr. / appr.	10.12.2025	Wihan			
Benennung / Designation :				Wasserspeicher / storage tank	
Typ RET 2700 special 1					

Zeichnung Nr. / Drawing No. :	Projekt Nr. / Project No. :	Bestell Nr. / Order No. :	Maßstab / Scale	Blatt / sheet
23408-0Rev1	P2500860_2	KST300/123853	1:15	1/1
				Stand/as per: 16.12.2025