
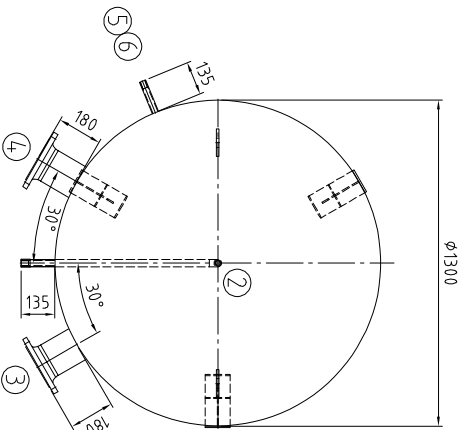


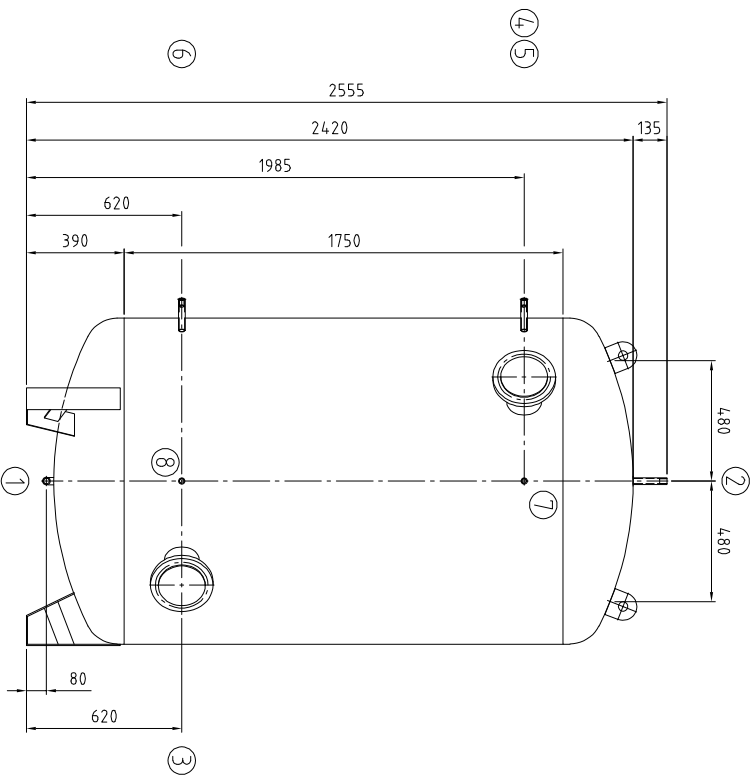

Kippmaß: 2720

Min./max. zul. Druck (PS) 0 / 6 bar
Min./max. zul. Temperatur (TS) 0 / 45 °C
Min./max. allow. pressure (PT) 9 bar
Test pressure (PT) 9 bar
Volumen (V) 2700 L
Capacity 2700 L
Oberflächenbearbeitung geätzt und passiviert
Surface treatment pickled and passivated
Werkstoff 1.4301
material
Gewicht 360 kg
Weight
Artikel-Nr.
Article number
Kategorie/Modul DGRL 2014/68/EU
Category/module PED 2014/68/EU

8	Thermometer	Rp 1/2"	DN 2986			
7	Thermometer	Rp 1/2"	DN 2986			
6	Sonde	Rp 1/2"	DN 2986			
5	Sonde	Rp 1/2"	DN 2986			
4	Flanschanschluss / flange connection	125	16	EN 1092-1/1		
3	Flanschanschluss / flange connection	125	16	EN 1092-1/1		
2	Entlüftung	Rp 1/2"	DN 2986			
1	Entlüftung	Rp 3/4"	DN 2986			
Stutzen	Benennung	DN	PN	Norm	Dichtfläche	Position
Nozzle	Denomination			Standard	Facing	Position

RevZ	12.01.2026	Riedel	Benker	Aenderung gemäß Kundenwunsch / change according to customer request
RevZ	16.12.2025	Altmanhofer	Wihan	Aenderung gemäß Kundenwunsch / change according to customer request
Index	Datum/date	Gez./drawn	Gepr./appr	Art der Änderung / Modification

Gez. / drawn	10.12.2025	Altmanhofer	Kennwert/Subject	
Gepr. / appr.	10.12.2025	Wihan		

Benennung / Designation:

Wasserspeicher / storage tank

Typ RET 2700 special 1

Zeichnung Nr. / Drawing No.:	Projekt Nr. / Project No.:	Bestell-Nr. / Order No.:	Maßstab / Scale	Blatt / sheet
236-08-0 RevZ	PZ500860_2	KST300/123853	1:15	1/1

