
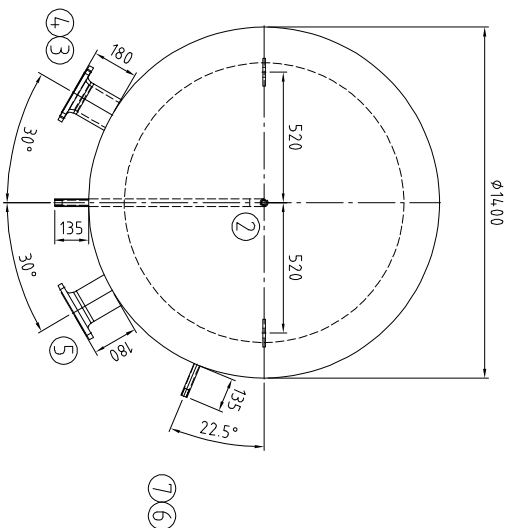


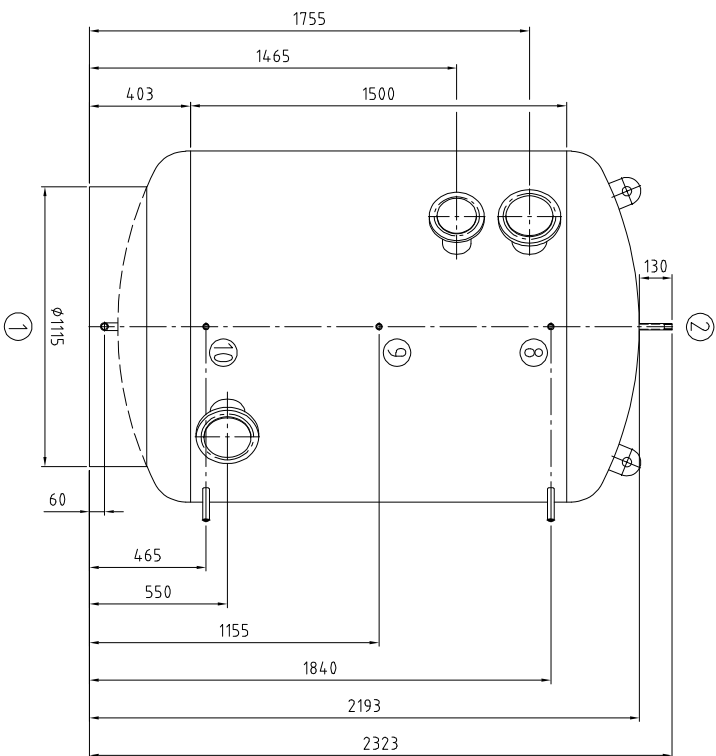

Kippmass: 2485

Min./max. zul. Druck	(PS)	0 / 6	Mantelraum inside of jacket	0 / 6	Rohrraum inside of tubes
Min./max. allow. pressure					bar
Min./max. zul. Temperatur	(TS)	0 / 109			°C
Min./max. allow. temperature					
Prüfdruck	(PT)	9			bar
Test pressure					
Volumen	(V)	3000			L
Capacity					
Oberflächenbearbeitung		gebeizt und passiviert
pickled and passivated			
Surface treatment					
Werkstoff		1.4571 / 1.4404			
material					
Gewicht		4.50			kg
Weight					
Artikel-Nr.		Art. 4. Abs. (3)			
Article number					
Kategorie/Modul DGRL 2014/68/EU					
Category/module PED 2014/68/EU					

10	Thermometer / thermometer	Rp 1/2"	DIN 2986		
9	Thermometer / thermometer	Rp 1/2"	DIN 2986		
8	Thermometer / thermometer	Rp 1/2"	DIN 2986		
7	Sonde / probe	Rp 1/2"	DIN 2986		
6	Sonde / probe	Rp 1/2"	DIN 2986		
5	Flanschsanschluss / flange connection	125	16 EN 1092-1/11		
4	Flanschsanschluss / flange connection	125	16 EN 1092-1/11		
3	Flanschsanschluss / flange connection	100	16 EN 1092-1/11		
2	Entlüftung / vent	Rp 1/2"	DIN 2986		
1	Entlüftung / vent	Rp 3/4"	DIN 2986		
Stutzen	Benennung	DN	PN	Dichtfläche	Position
Nozzle	Denomination			Standard	Facing
					Position
					Rohtabmessung
					Dimension

Rev1	12.01.2026	Rietel	Benker	Änderung gemäß Kundenwunsch / change according to customer request	
Index	Datum/date	Gez./drawn	Name/name	Art der Änderung / Modification	
	16.12.2025		Eitzold		
Gez. / drawn	16.12.2025	Whan			
Gepr. / appr.					
Benennung / Designation : Wasserspeicher / storage tank					
Typ RET 3000 special 2					
Zeichnung Nr. / Drawing No. : Projekt Nr. / Project No. : Bestell-Nr. / Order No. : Maßstab / Scale : Blatt / sheet : 234-17-0 Rev1 P2500860_4 KST300/123853 1:15 1/1					
Stand/as per: 12.01.2026					

