



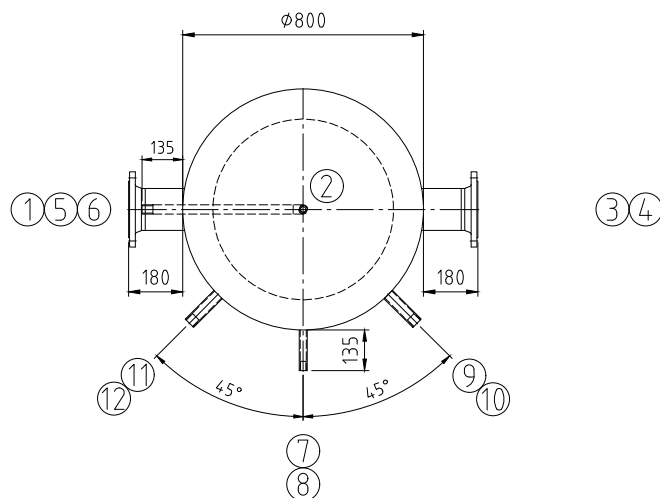

Kippmaß: 2020

		Mantelraum Inside of jacket		Rohrraum Inside of tubes	
Min./max. zul. Druck Min./max. allow. pressure	(PS)	0 / 3			
Min./max. zul. Temperatur Min./max. allow. temperature	(TS)	0 / 109			
Prüfdruck Test pressure	(PT)	4,5			
Volumen Capacity	(V)	800			
Oberflächenbearbeitung Surface treatment		gebeizt und passiviert pickled and passivated			
Werkstoff material		1.4571 / 1.4404			
Gewicht Weight		125 kg			
Artikel-Nr. Article number					
Kategorie/Modul DGRL 2014/68/EU Category/module PED 2014/68/EU		Art. 4 Abs. (3)			

12	Thermometer	Rp 1"	DIN 2986			
11	Thermometer	Rp 1"	DIN 2986			
10	Thermometer	Rp 1"	DIN 2986			
9	Muffenschluss / socket connection	Rp 1"	DIN 2986			
8	Thermometer	Rp 1/2"	DIN 2986			
7	Thermometer	Rp 1/2"	DIN 2986			
6	Flanshschluss / flange connection	125	16	EN 1092-1/11		
5	Flanshschluss / flange connection	125	16	EN 1092-1/11		
4	Flanshschluss / flange connection	125	16	EN 1092-1/11		
3	Flanshschluss / flange connection	125	16	EN 1092-1/11		
2	Entlüftung	Rp 1"	DIN 2986			
1	Entleerung	Rp 3/4"	DIN 2986			
Stutzen Nozzle	Benennung Denomination	DN	PN	Norm Standard	Dichtfläche Facing	Position Position
Rev.1	16.12.2025	Altmanshofer	Wihan	Änderung laut Kundenwunsch / Change according to customer request		
Index	Datum/date	Gez./drawn	Gepr./appr.	Art der Änderung / Modification		
	Datum/date	Name/name		Kennwort/Subject:		
Gez. / drawn	10.12.2025	Altmanshofer				
Gepr. / appr.	10.12.2025	Wihan				
Benennung / Designation :						
Wasserspeicher / storage tank						
Typ RET 800 special						
Zeichnung Nr. / Drawing No. :		Projekt Nr. / Project No. :		Bestell Nr. / Order No. :		Maßstab / Scale
23409-0Rev1		P2500860_3		KST300/123853		1:12.5
						Blatt / sheet
						1/1
						Stand/as per: 16.12.2025

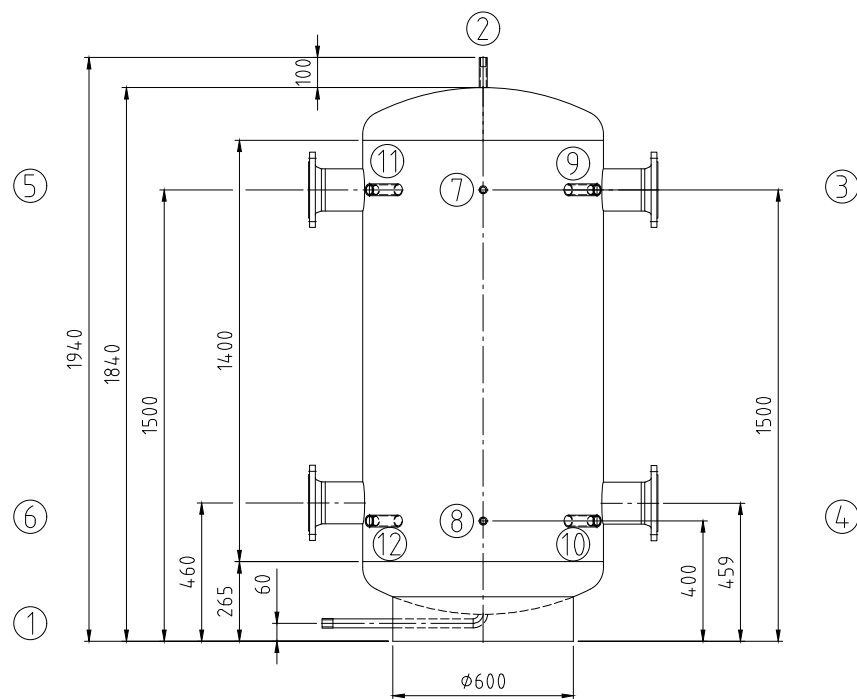