



Customer: ISPAG  
 Ref. order: KST300/124673  
 Ref. offer: --  
 Ref. OFV: OFV26-0189

## N° 1 Pcs

Tank1: DHW  
 Material: **Inox AISI 316L (1.4404)**  
 External treat.: **PICKLED**  
 Internal treat.: **PICKLED**  
 Pressure (exerc./test): **6/9 bar**

Insulation: **INSTALLED**  
 Material: **POLYESTER + POLYSTYRENE**  
 Thickness: **10+100 mm**  
 Cover: **ABS**  
 Color: **RAL 9016**

Bill of Materials: 99.02091630-26R							
ID	Description	Code	Notes	Material	UM	Qt	Cut (mm)
1	1/2" L=100	TML000864		Inox AISI 316L (1.4404)	PZ	4	--
2	1" L=20	TML000720		Inox AISI 316L (1.4404)	PZ	1	--
3	1"1/4 L=100	TML000854		Inox AISI 316L (1.4404)	PZ	2	--
4	1"1/2 L=100	TML000856		Inox AISI 316L (1.4404)	PZ	2	--
5	210/280 BLIND	TML005497		Inox AISI 316L (1.4404)	PZ	1	--
6	210/280 GASKET	TML005557		Sesalit Eco	PZ	1	--
7	210/280 FLANGE M14	TML001537		Inox AISI 316L (1.4404)	PZ	1	--
8	EXCH. 4 M² W/2 CONN. 1"1/4	TML016225		Inox AISI 316L (1.4404)	PZ	1	--
9	EXCH. 4 M² W/2 CONN. 1"1/4	TML016226		Inox AISI 316L (1.4404)	PZ	1	--
10	D.900 FOOT	TML005311		Inox AISI 304 (1.4307)	PZ	3	--
11	1" CAP	TML003648		Inox AISI 316L (1.4404)	PZ	1	--
12	DEFLECTOR	TML006222		Inox AISI 316L (1.4404)	PZ	1	--
13	LIFTING POINT	TML005372		Inox AISI 304 (1.4307)	PZ	2	--
14	DN32 SPARGE PIPE	TML010726		Inox AISI 316L (1.4404)	MT	0.35	1 x 350
15	DN40 SPARGE PIPE	TML006802		Inox AISI 316L (1.4404)	MT	0.35	1 x 350

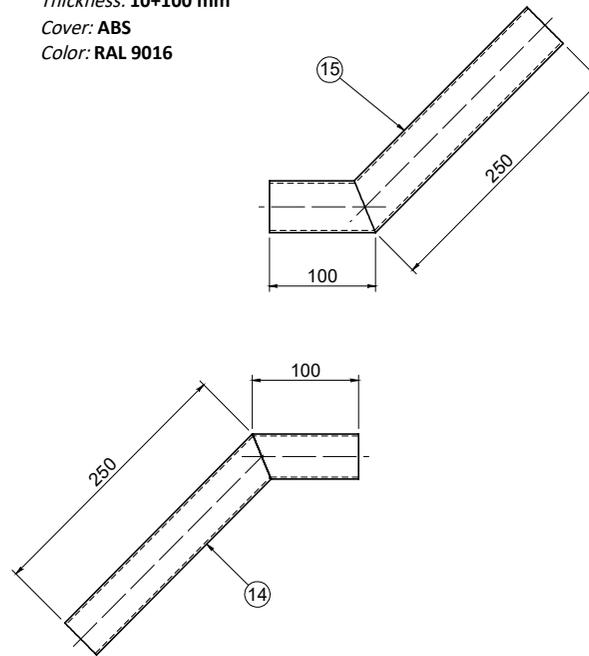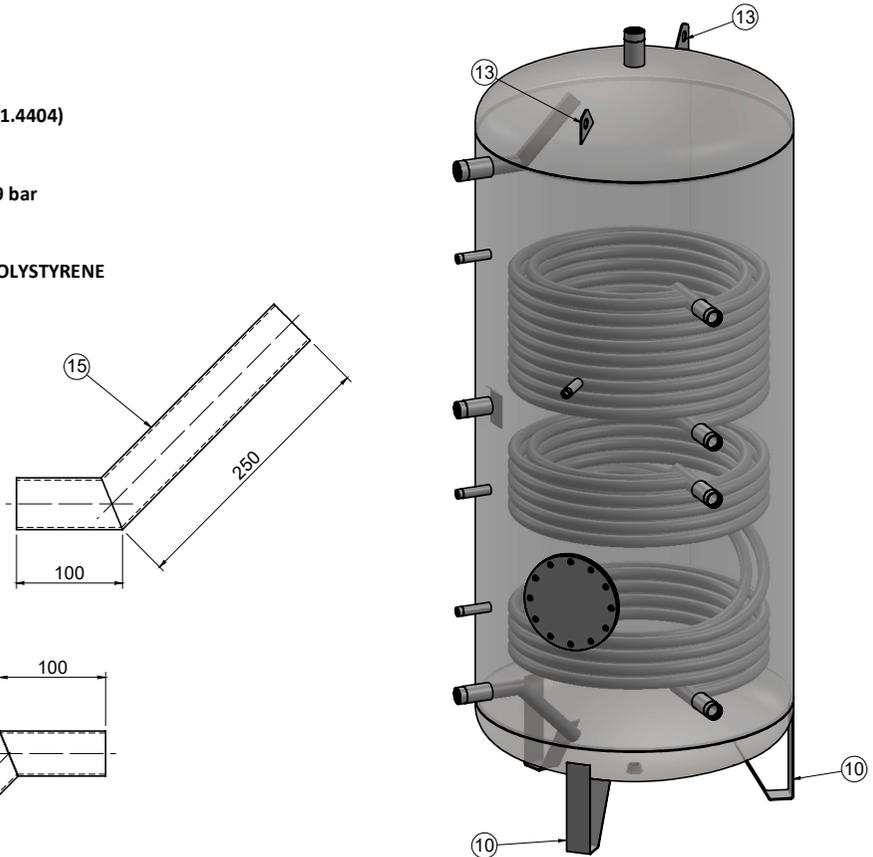

PER CLIENTE

TOLLERANZA QUOTE ±5MM Dimensioni Tollerance ±5mm	Nome file: TML016227c		Nr. Articolo:
	Stato: <b>In Approv.ne Comm.le</b>		<b>99.02091630-26R</b>
	Data: 09/02/2026		WP2X SPECIALE 1250 Lt COIB. VLIJES + POLISTIROLO 10+100
	Autore: Giuliano Iodice		
	Pag: 1 di 1	Scala: 1:15	Foglio1
Formato: <b>A3</b>		Materiale:	Peso:
		Trattamento:	<b>272.61 kg</b>
		Rev: <b>01</b> - Creata: GI 13/02/2026 - Approvata: GI 13/02/2026	
		IL CLIENTE CHIEDE MODIFICA QUOTE SERBATOIO E POSIZIONE DI ALCUNE CONNESSIONI	